




Vinyl laminated on a weft insertion scrim base of high tenacity filament polyester.

aqua-tex® II

HEAVY DUTY PLEASURE BOATING FABRICS

- Impermeable
- Fire Resistant
- Tear Resistant
- Mildew / Rot Resistant
- Ultraviolet Resistant
- Abrasion Resistant

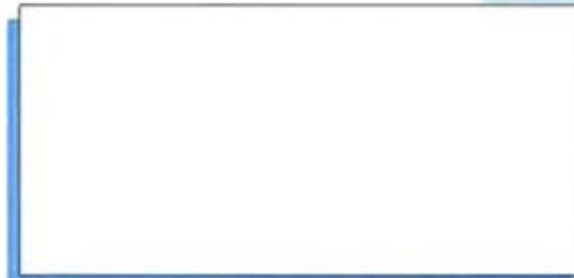

White/White



Black/Black

Ivory/Ivory

Tawny/Tawny



White/Blue

White/Grey

Ivory/Grey

TYPICAL APPLICATIONS

- Awnings • Bimini Covers
- Binnacle Covers • Boom Covers
- Cockpit Covers • Convertible Tops
- Cushion Covers • Dinghy Covers
- Dodgers • Equipment Covers
- Flying Bridge Covers
- Hatch Covers • Mooring Covers
- Navy Tops • Outboard Motor Covers
- Sail Bags • Side & Rear Curtains
- Weather Cloths • Wheel Covers
- Outdoor BBQ Kitchen Island covers

TYPICAL PERFORMANCE PROPERTIES (Average)

Fabric Weight	12.4 oz. / sq. yd.	
Flame Retardance		
Flame Time	0.5 sec.	
Char Length	3.8"	
	Warp	Fill
Breaking Strength	139 lbs.	115 lbs.
Tear Resistance	16 lbs.	16.3 lbs.
Hydrostatic Resistance	192 PSI	
Wet Shrinkage	0.8%	
Cold Crease	-35 Deg F No cracking	

This information is offered for your general guidance and has been obtained by modern test methods. It is true and accurate to the best of our knowledge at time of printing. However, it should not be construed as specifications and is subject to revision as added knowledge and experience on this product are gained.